

StreamPoint

Encoder



StreamPoint encoders are revolutionary AV over IP h.264 encoders. You can seamlessly and easily encode any signal to be visualized at different locations on the network. StreamPoint encoders are all fully compatible with Jupiter's display wall processors, extending the solution to expand the functionality of any deployment.

- **H.264 encoding**
- **FHD to 4K capture and encoding options**
- **Unicast, multicast or multi-unicast streaming**
- **Mux together multiple inputs**
- **Audio encoding**
- **Multiple encoding profiles**
- **Loop-out video for local preview or viewing**
- **Centralized management of hardware and users**

HD / 4K

4K or 1080p Display Resolution


4

Four simultaneous 4K channels that can stream, process and record in multiple settings, without sacrificing quality.



Easily integrates with PixelNet, Catalyst, Canvas and other display wall products

Architecture of a StreamPoint Installation

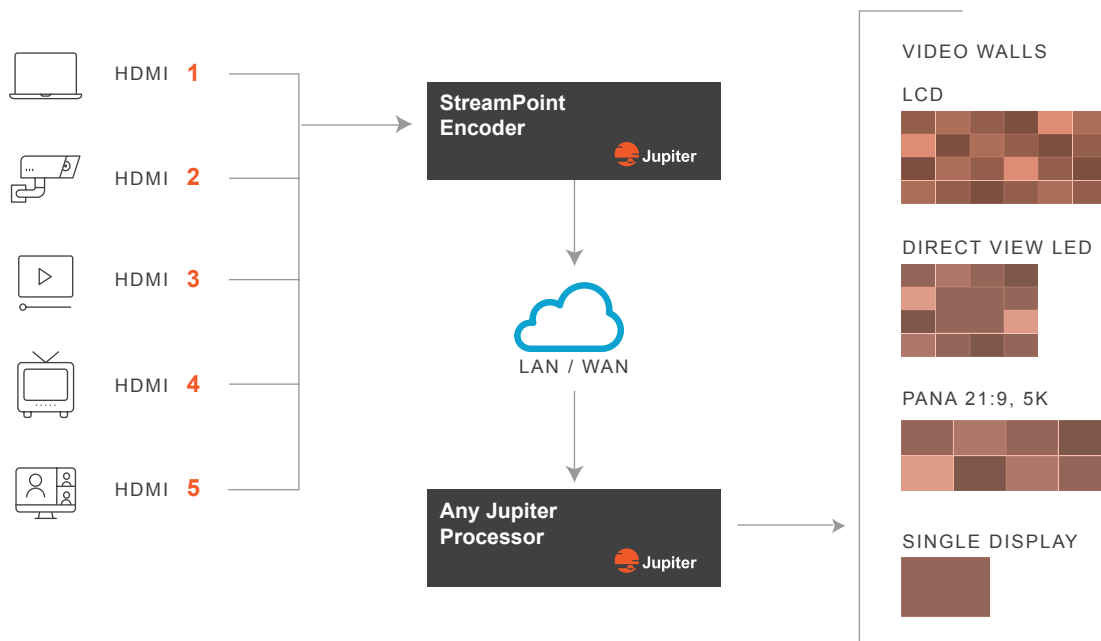

StreamPoint Specifications

INPUTS		HD	4KSCA	4KSCH
Video Input Interface	1x HDMI with digital L-PCM audio DVI via DVI-to-HDMI adapter	1x HDMI® 2.0 (Type A) with audio support		
Video Output / Pass-Through Interface	HDMI with digital L-PCM audio, local pass-through w/o scaling, or confidence preview w/ optional scaling DVI via HDMI to DVI-D adapter, local pass-through w/o scaling or confidence preview w/ optional scaling HD15, Analog VGA – confidence previewProcamp control: contrast, brightness, saturation, hue Scaled output (i.e., 1080p60 input/720p60 scaled output) w/ optional scaling Resolutions up to 1920x1080p60, 1920x1200(60Hz), 1920x1080i50, 1920x1080i60"	1x HDMI® 2.0 (Type A) with audio support		
Audio Line-In	3.5mm analog stereo audio	"1x 3.5 mm analog stereo audio in - 0.57 Vrms -29 kΩ -6 dB to +16.5 dB"		
Audio Line-Out (Local Pass-Through)	3.5mm analog stereo audio	1x HDMI digital LPCM two-channel stereo audio		
Network Connector	RJ45			
VIDEO ENCODING				
Resolution	Single-Channel HD Up to 1920x1080p60 and 1920x1200(56Hz) and many more wide-screen and standard-definition resolutions	Maximum Capture Resolution 1x 3840x2160 @60Hz Color Space Capture: • RGB and YUV 8-bit support • Color space conversion support		
Codec	H.264/MPEG-4 Part 10 (AVC)	H.264/MPEG-4 Part 10 (AVC) Chroma Sub-Sampling • 4:2:0 (8-bit)	H.264/MPEG-4 Part 10 (AVC) H.265/MPEG-H Part 2 (HEVC) Chroma Sub-Sampling • 4:2:0 (8-bit)	
Profiles	Main	Baseline (BP), Main (MP), High (HiP), High10 (Hi10P), Intra, up to Level 5.2	Main (MP), Main Intra, Main10, Main10 Intra, Main, Intra up to Level 5.1 High Tier	
Levels	Up to 4.2	Up to 5.2		
Bit Rates	100 Kbps to 25 Mbps	"64Kbps to 60 Mbps 15 Mbps (default)"		
Rate Control	CBR, VBR, Favor Speed, Favor Quality, Adjustable GOP Size	CBR, VBR, adjustable GOP size		
Security				
AUDIO ENCODING				
Codec	MPEG4 AAC-LC	MPEG-4 AAC-LC, OPUS and LPCM		
Channels	2 channel (stereo), HDMI with digital L-PCM audio	2 channel (stereo), HDMI with digital L-PCM audio		
Analog Frequency		32 kHz, 44.1 kHz, and 48 kHz		
Bit Rates	96, 128, 192, and 256 Kbps	From 64 to 320 Kb/s (AAC-LC, OPUS and LPCM)		
NETWORKING				
Speed	100/1000base-T Ethernet 1000 Mbps full duplex 100 Mbps Half/full duplex	100/1,000 base-T Ethernet, auto speed, half/full duplex IGMPv2 and IGMPv3 support		
Streaming Protocol	RTSP/RTP/RTCP (all required) over UDP	• RTSP (TCP), RTCP & RTP (UDP) - all required • RTP over UDP • SRT over UDP • RTMP/(S) • MPEG2-TS over UDP • MPEG2-TS over RTP • RTSP over TCP (interleaved)		
Control	HTTPS	HTTPS over TCP, UPnP (discovery), SSDP		
Protocols	IPv4 Support Unicast, Multicast and Multi Unicast DHCP (Default) / Fixed IP Address Support CAT5-or-Better Network Cables	IPv4, DHCP (default) and static IP address support Unicast, multicast		
RECORDING				
Connectivity				
File Formats		Transport Stream (.TS)		
Programmability		Start/stop, duration, file location		
Recording Locations		Shared network drive or NAS		

StreamPoint Specifications Continued

MANAGEMENT SOFTWARE	HD	4KSCA	4KSCH
OS Support	Microsoft® Windows® 10 (64-bit), Windows Server® 2016, Windows 7 (32-bit, 64-bit), Windows Server 2008 R2	Microsoft® Server® 2022, Windows® Server® 2019, Windows® 11, Windows® 10	
Security	Password Protected		
Control	Resides on any PC on the same subnet		
MECHANICAL			
Dimensions	21.59cm x 2.59cm x 10.16cm (8.50" x 1.02" x 4.00")	7.11 x 5.50 x 1.31 in (18.07 x 13.97 x 3.33 cm)	
Weight	378g (excl. external power supply and power cords)	~350 grams/0.77 lbs (excl. external power supply and power cords)	
Voltage	100-240 VAC in, 12 VDC out		
Watt	15W	~12W typical (40W max)	
Connector	DI N4 Locking Power Connector	Barrel locking power connector	
Power Cords	US, EU		
CERTIFICATIONS			
Regulatory Certifications	CE/FCC/VCCI/ICES/C-Tick/KCC Class B, ROHS/WEEE	FCC,CE,RCM,VCCI,KC, ICES-3	



jupiter.com

© 2023 Jupiter. Jupiter is a registered trademark of Jupiter Systems, Inc. Product specifications and designs are subject to change without notice. All brand and products names and logos are registered trademarks of Jupiter Systems, Inc.